

# LIFELINE EXTERIOR

## Semi-Transparent Stain and Sealer


Lifeline Exterior is a semi-transparent finish that shades and highlights wood's natural beauty. In addition to enhancing the splendor of your home, Lifeline Exterior provides a weather-resistant polymer film that allows logs to breathe and dry. This is especially important when staining green or partially dried logs.

Lifeline Exterior may be applied by brush, pad or spray. For best results use an airless sprayer and back-brush. We recommend that two coats of Lifeline Exterior be applied for maximum performance and color development.

For extra UV protection add UV Boost - a concentrated water-based liquid stain additive for the first coat of stain. Highly pigmented stains last longer in intense sunlight. For best results and performance, apply Lifeline Advance immediately after Lifeline Exterior is dry or wait no more than 12 months to apply Lifeline Advance Gloss or Satin.

Lifeline Exterior's ease of application makes it the perfect choice for the do-it-yourself log homeowner.

## Lifeline Exterior Colors

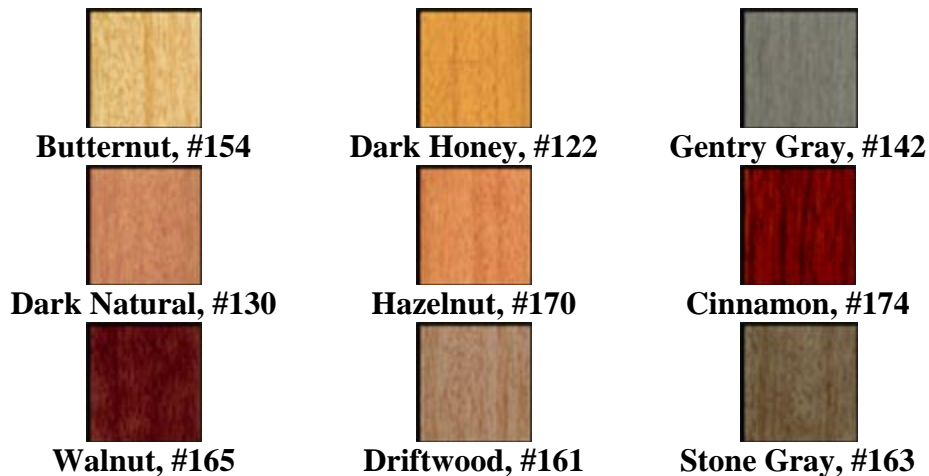

## Features and Statistics

- A breathable sealer
- Mold inhibitors

- **Non-yellowing**
- **Semi-transparent**
- **UV-ray protection**

- [MSDS](#) 
- [LIFELINE Application Guide](#) 

To view and/or print MSDS sheets or labels you need Acrobat Reader. If you don't have Acrobat Reader installed on your computer, [click here](#) for a free download.

<b>Shelf Life</b>	<ul style="list-style-type: none"> <li>• <b>1 year</b></li> </ul>
<b>Application Temperature</b>	<ul style="list-style-type: none"> <li>• <b>40° to 90°</b></li> <li>• <b>Best to apply out of direct sunlight.</b></li> </ul>
<b>Application Methods</b>	<ul style="list-style-type: none"> <li>• <b>Airless Sprayer</b></li> <li>• <b>Brush</b></li> <li>• <b>Back-brushing required</b></li> </ul>
<b>Surface Preparation</b>	<ul style="list-style-type: none"> <li>• <b>Clean and Dry</b></li> <li>• <b>Free of mold and mildew</b></li> <li>• <b>Never use steel wool</b></li> </ul>
<b>Frequency</b>	<ul style="list-style-type: none"> <li>• <b>Depends on weather exposure</b></li> </ul>
<b>Special Instructions</b>	<ul style="list-style-type: none"> <li>• <b>2 coats. Must be back-brushed.</b></li> <li>• <b>Stir every 15 minutes.</b></li> <li>• <b>Maintain a wet edge to prevent lap marks.</b></li> <li>• <b>One coat LIFELINE ADVANCE recommended.</b></li> <li>• <b>Avoid applying in direct sun.</b></li> </ul>
<b>Drying Time</b>	<ul style="list-style-type: none"> <li>• <b>Dry to the touch in 1 hour and cures in 3 days</b></li> </ul>

## Lifeline Exterior Price List

5 gal (50 lb) pail

1 gal (10 lb)



 [PCSproducts.com](http://PCSproducts.com)

## LIFELINE EXTERIOR Coverage Rate per Gallon

First Coat	350-450 square feet
Second Coat	600-800 square feet